


Glass clamps - EN-12600 - Performance table (top mount)

MOD: 20 / 21 / 22 / 24 / 26 / 28 / 42 Test setup

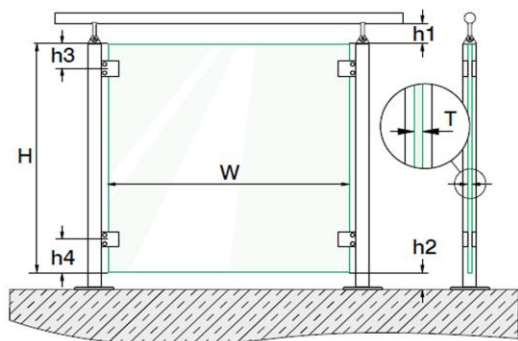

Dimensions (mm)		min.	max.
W	Glass width	500	See table
T	Glass thickness	See table	See table
H	Glass height	800	1000
h1	Handrail - top glass panel	10	50 without edge protection 120 with edge protection
h2	Floor - base glass panel	10	50 without edge protection 120 with edge protection
h3	Top glass panel - upper glass clamp	100 (MOD 20-26) 50 (MOD 28) 120 (MOD 42)	150
h4	Lower glass clamp - base glass panel	100 (MOD 20-26) 50 (MOD 28) 120 (MOD 42)	150

INDOOR

Glass clamps without security pin and without security plate.

MOD 20

Zinc

304

V2A



Flat or tube
 $\varnothing$ 33,7 mm
 $\varnothing$ 42,4 mm

Glass type	Mono / ESG-H*
T (mm)	8
W _{max} (mm)	500 - 1200