




THE WHOLESALE GLASS CO.

0208 664 3768


sales@wholesaleglasscompany.co.uk

Model 4212 High Performance Anchor


Installation Advice:

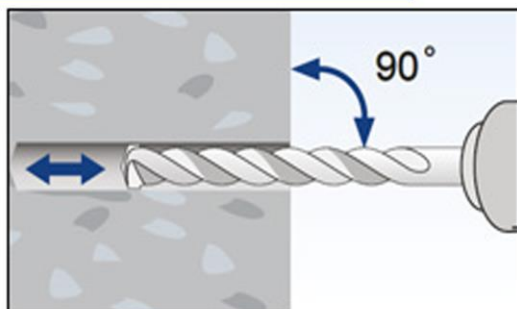


1. Drill 12mm diameter fixing hole.

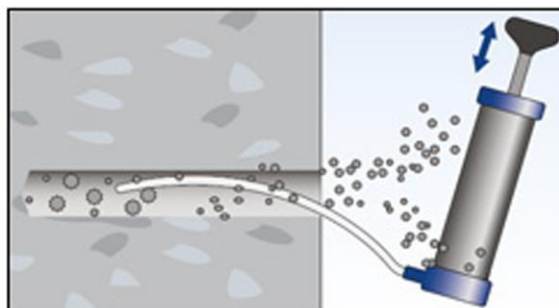


2. Clean with air pump to remove dust and debris.

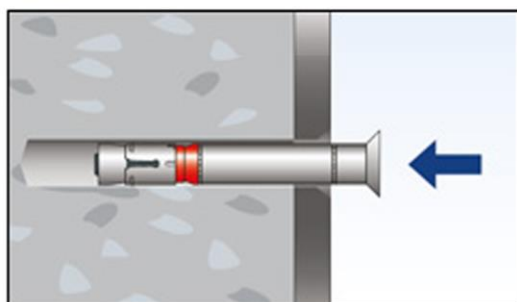

3. Insert anchor bolt.

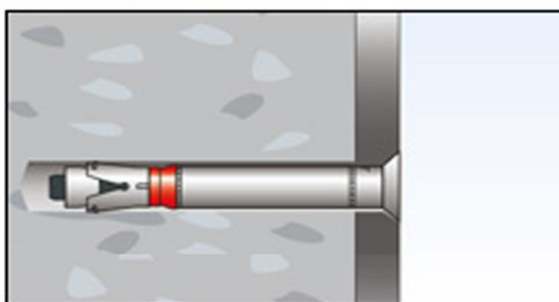

4. Use hex head key to tension anchor bolt.

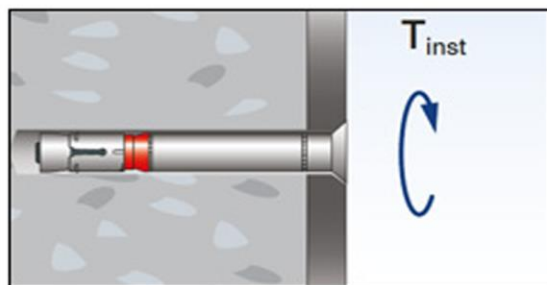

5. Check fixing is secure.

Glass Channel Balustrade Installation Advice:

When used to secure glass channel bottom mounting profile - top mount a minimum of 88.5mm is recommended for mounting externally (316).

