




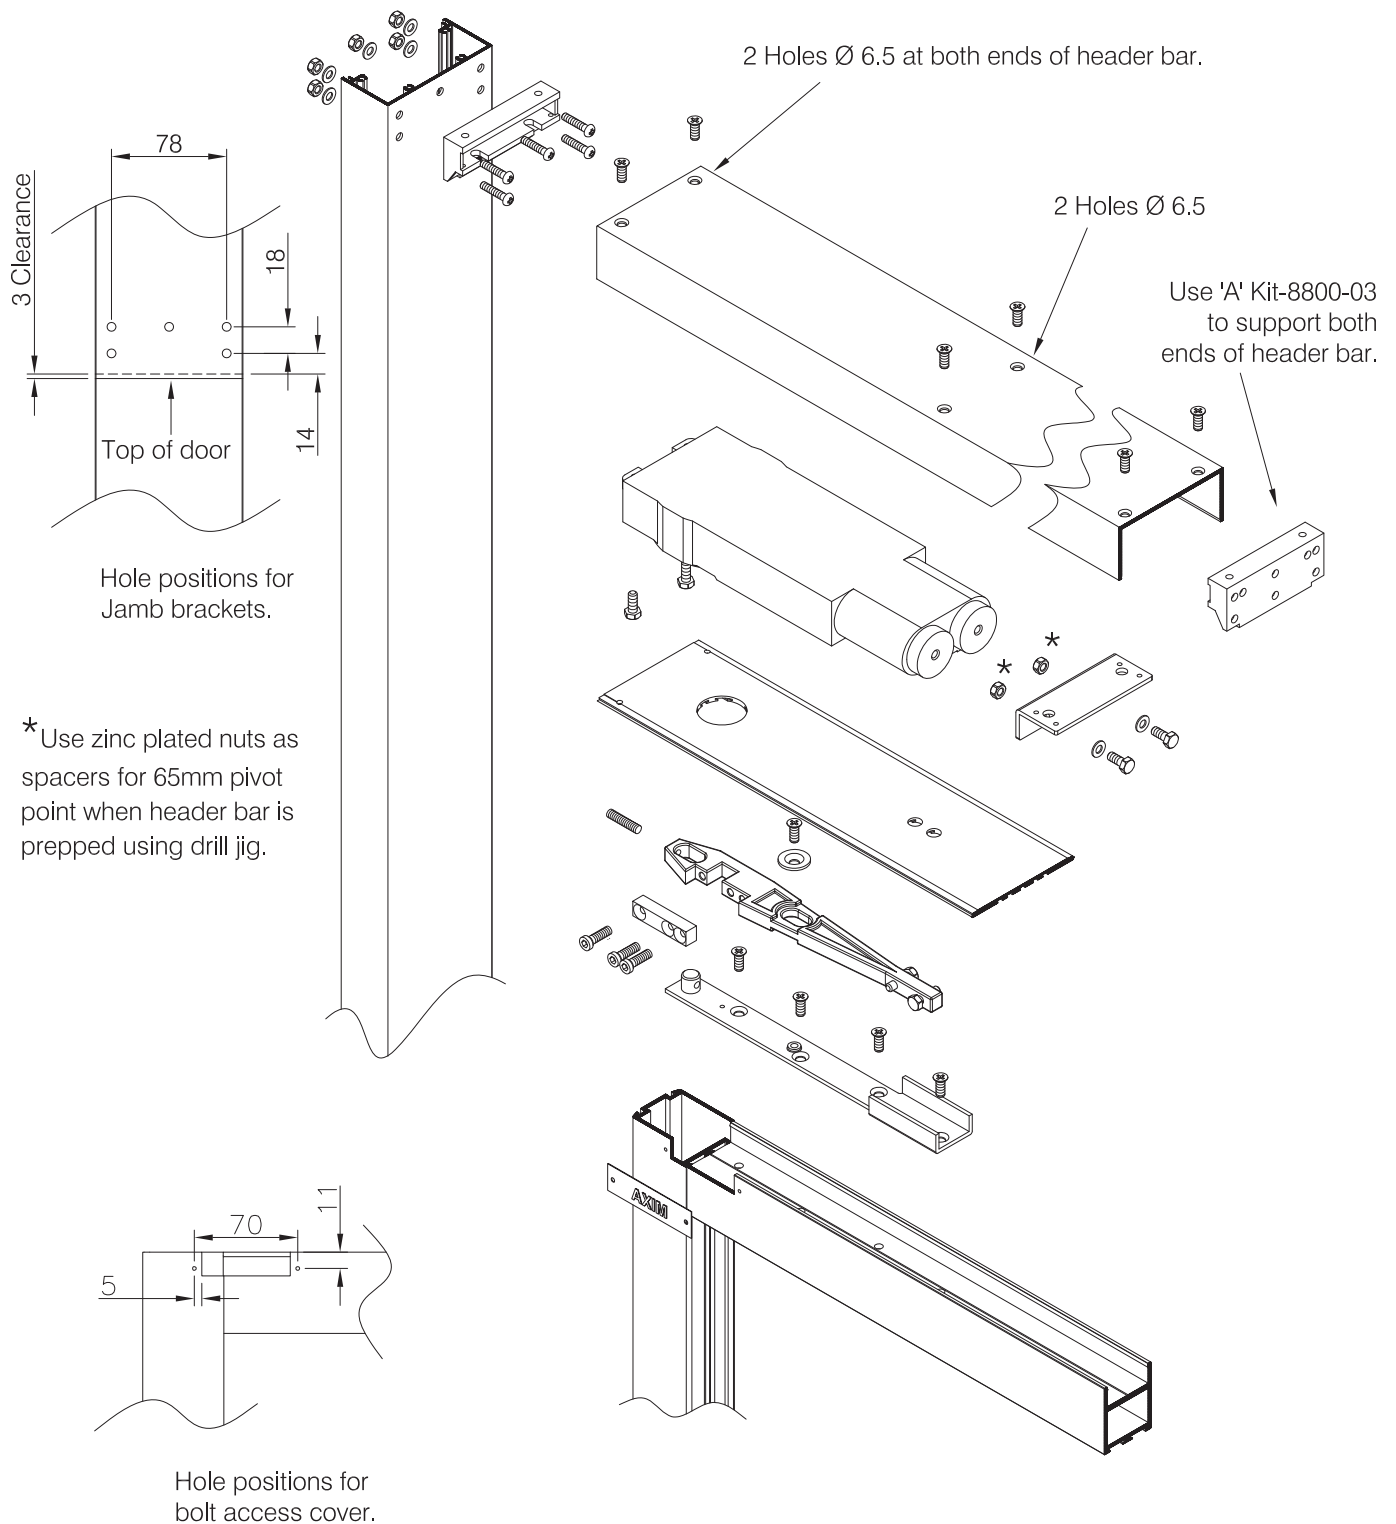


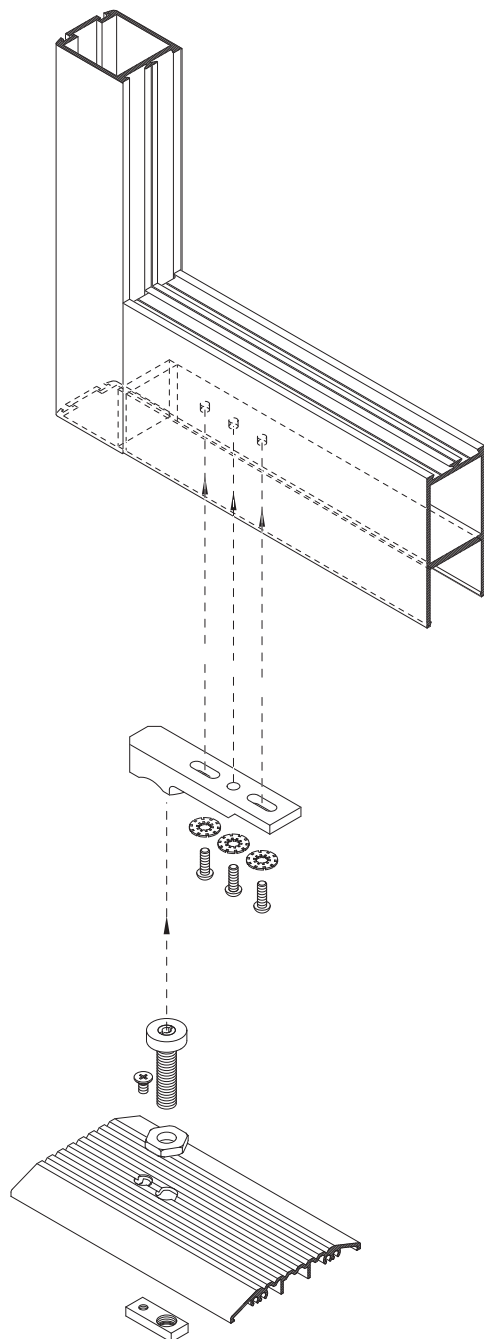

Bearing plate for
use with thresholds


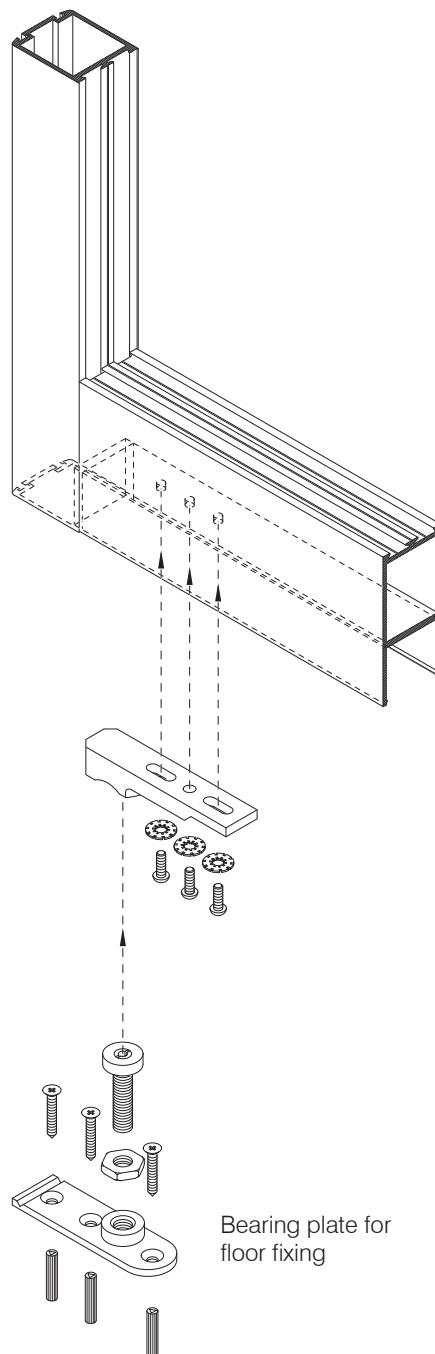


Bearing plate for
floor fixing

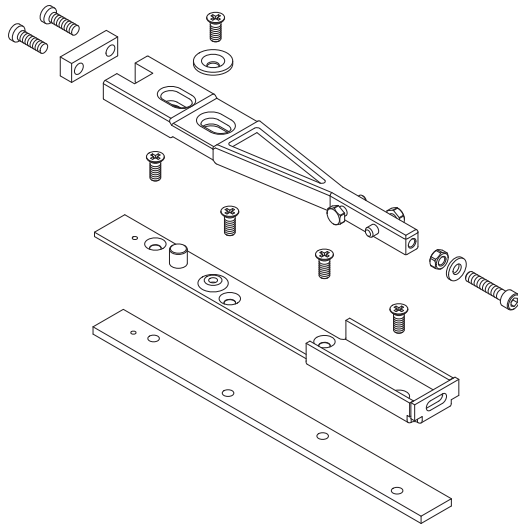


End load top arm & spacer bar TC-8800-15


For use on end loading and anti-finger trap doors.
When using standard door rails spacer bar is not required.

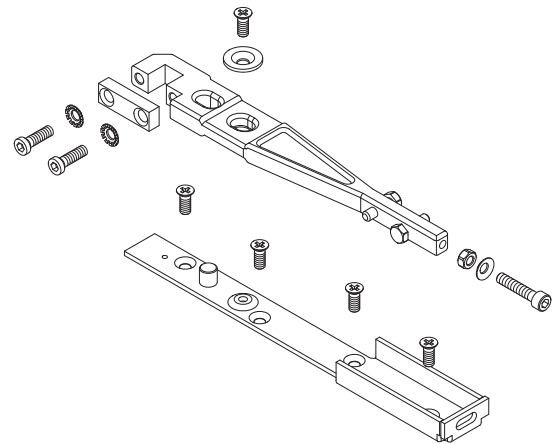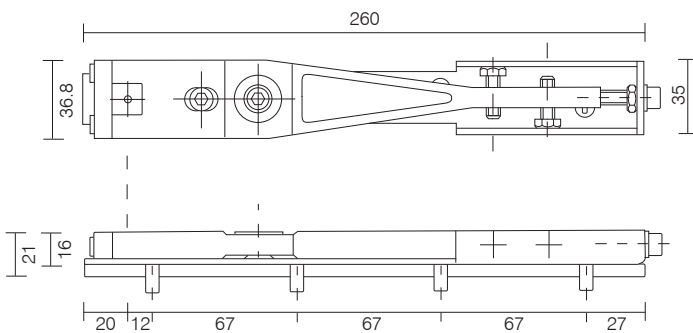



Std. top side load arm TC-8800-13

For use on side loading and anti-finger trap doors.

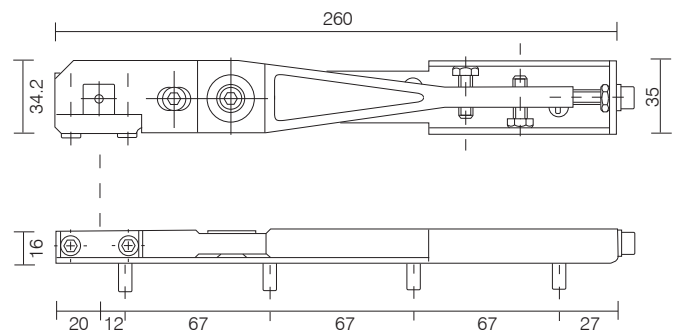


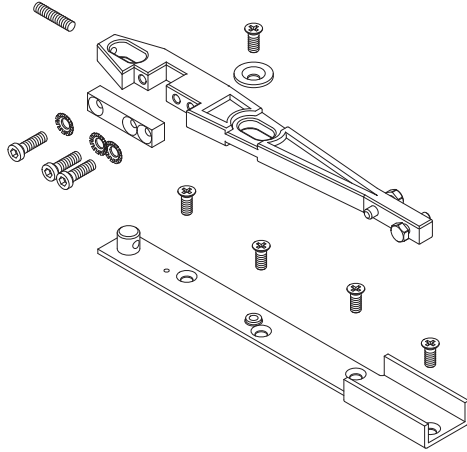


Top side load arm TC-8800-T13
For use on side loading doors.
(Arm supplied with standard transom closer kit)

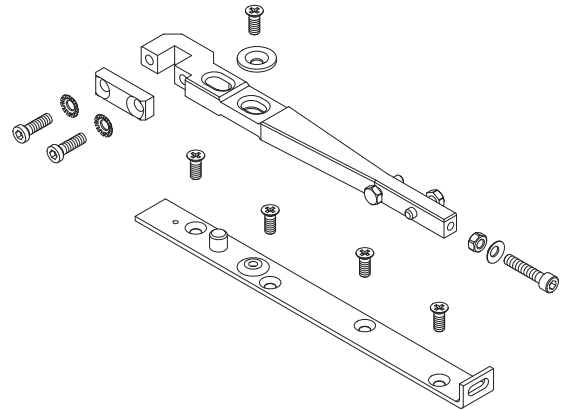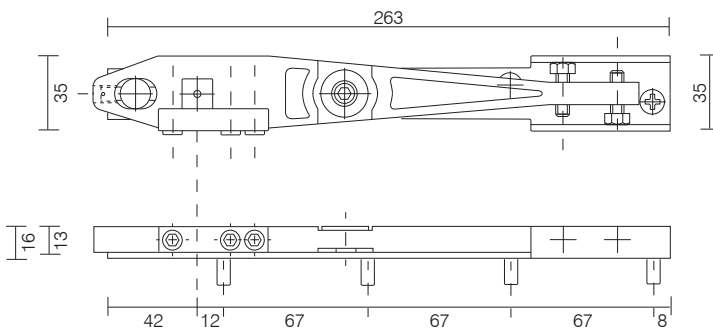


Universal arm TC-8800-01
For use on side loading and armour glass doors

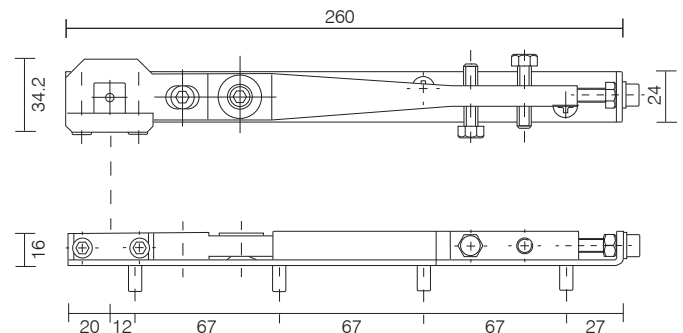


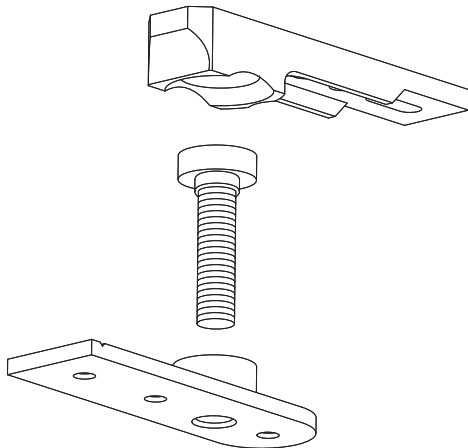


Std bottom pivot assembly
TC-8800-02

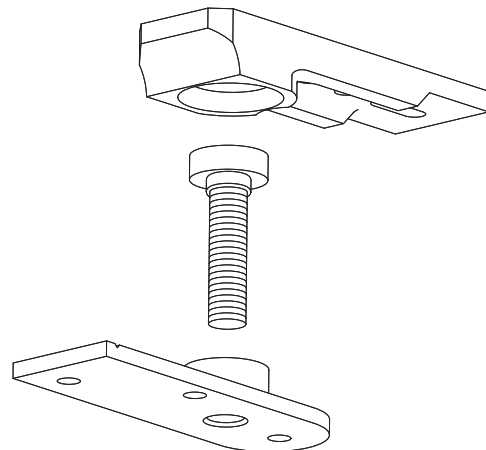


Heavy duty bottom pivot assembly
TC-9500-17. Used with anti finger-trap doors

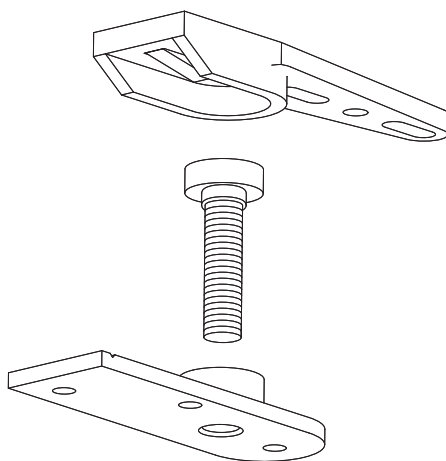


End load bottom pivot assembly
TC-8800-14



Alternative bottom bearing plate for use with
thresholds supplied as standard with all bottom
pivot assemblies

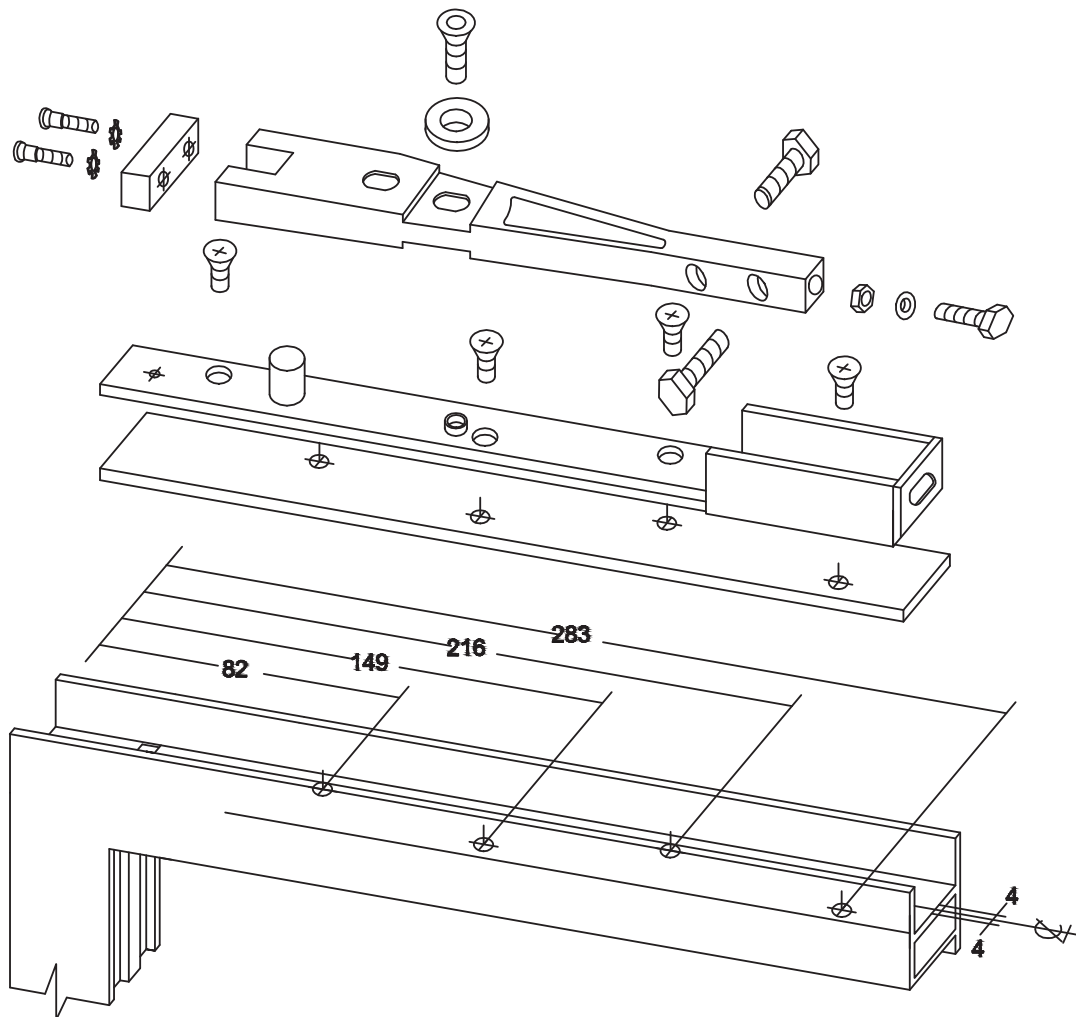

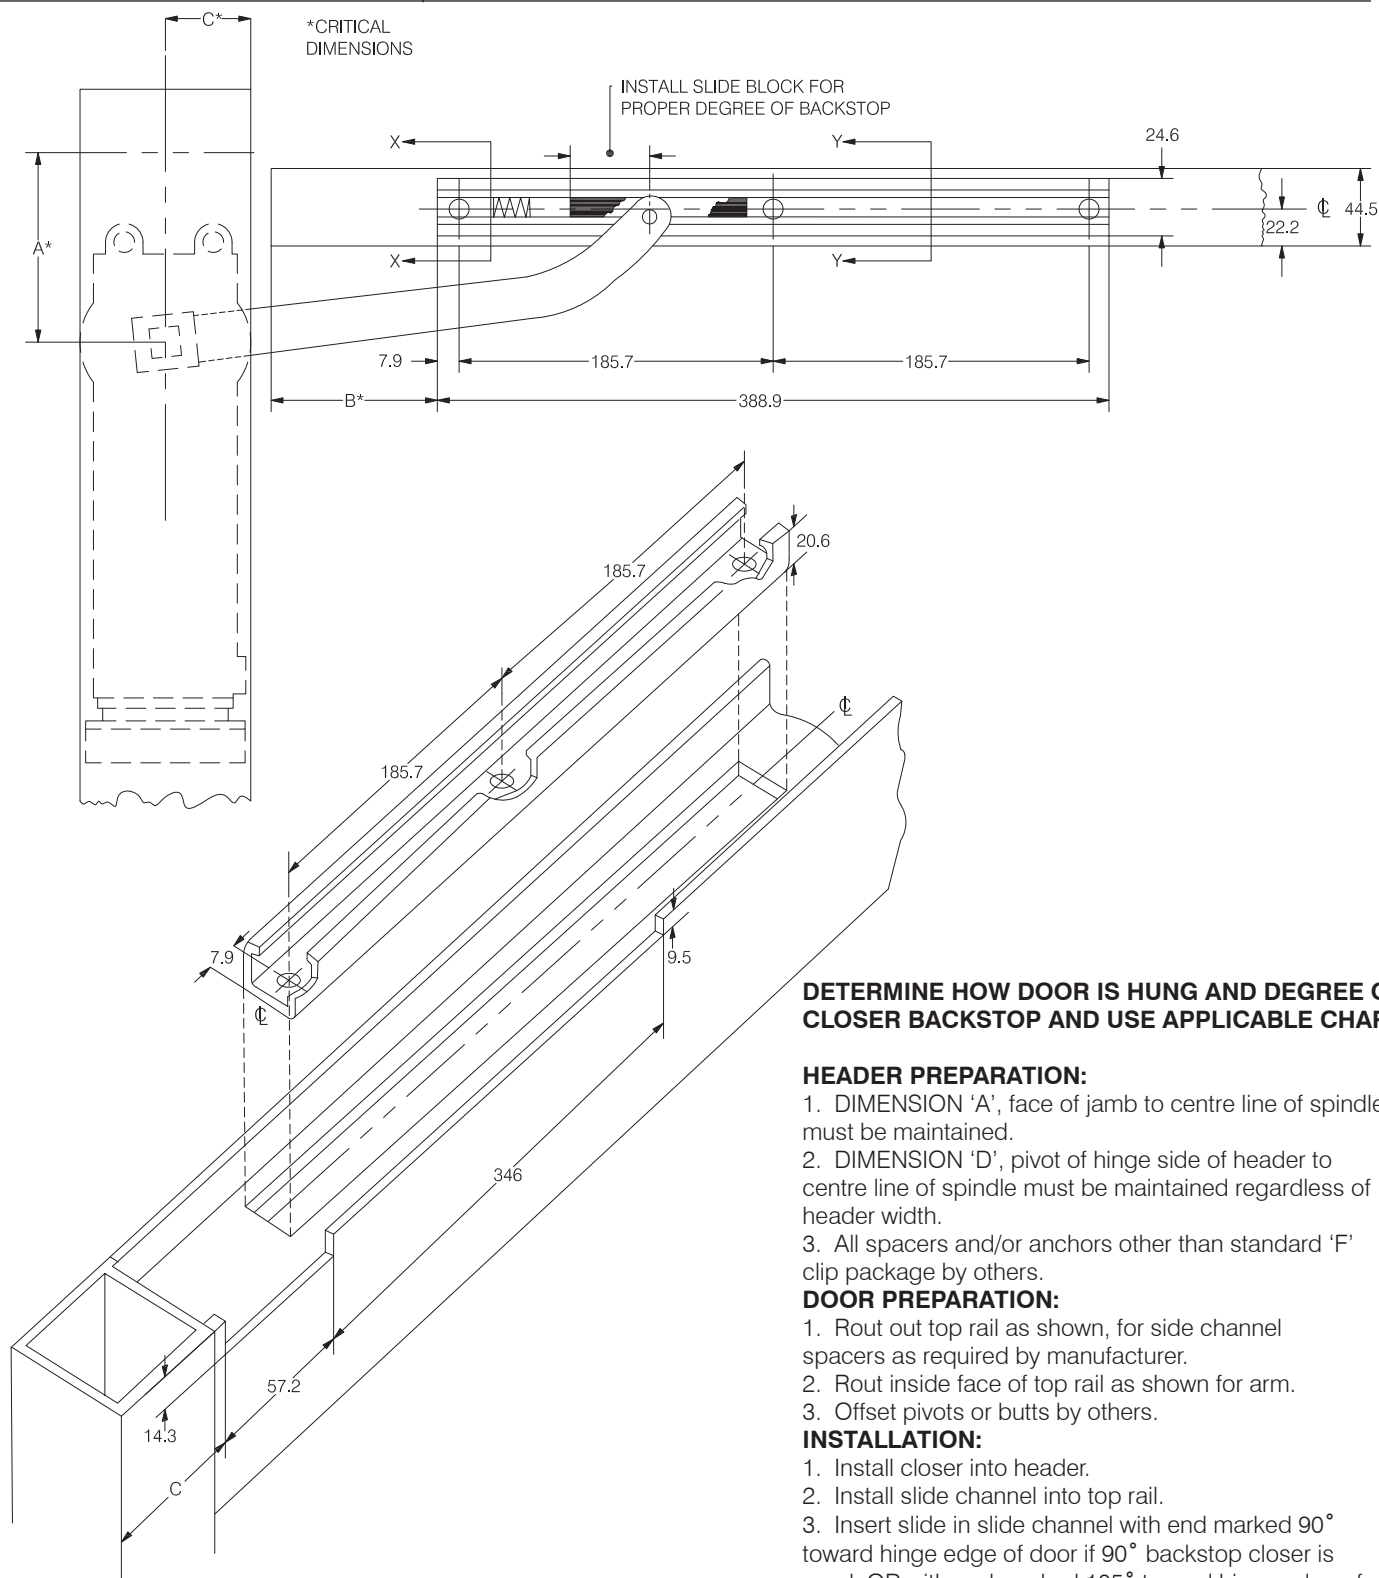

STANDARD BUTT HINGE DOOR MINIMUM 101.6mm HEADER				
Backstop	A (mm)	B (mm)	C (mm)	D (mm)
105°	95.25	98.4	66.7	50.8
90°	73	103.2	44.5	50.8

19.1mm OFFSET PIVOTED DOOR FLUSH DOOR MINIMUM 101.6mm HEADER				
Backstop	A (mm)	B (mm)	C (mm)	D (mm)
105°	114.3	119.1	85.7	50.8
90°	95.25	125.4	60.3	50.8

15.9 mm OFFSET PIVOTED DOOR 3.2mm RECESSED DOOR MINIMUM 114.3mm HEADER				
Backstop	A (mm)	B (mm)	C (mm)	D (mm)
105°	114.3	119.1	85.7	54.0
90°	95.25	125.4	60.3	54.0

